

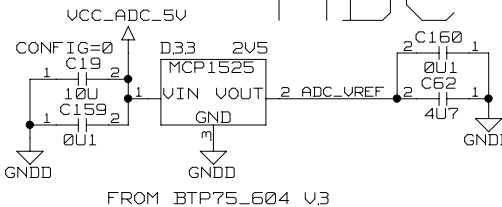

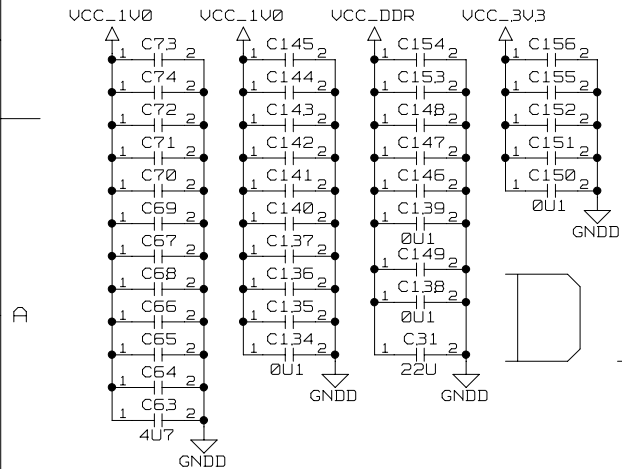
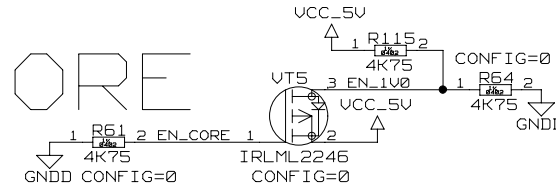
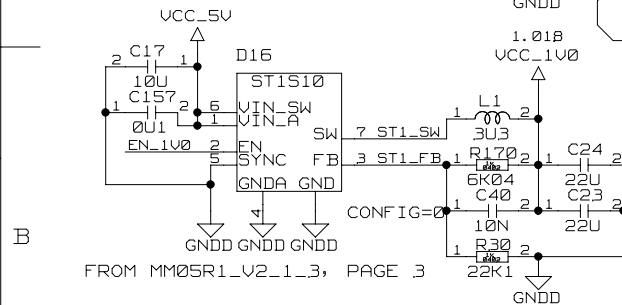
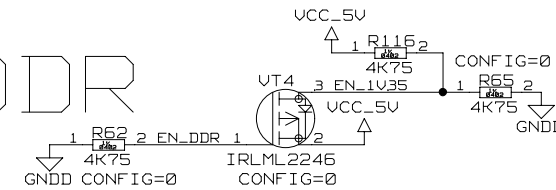
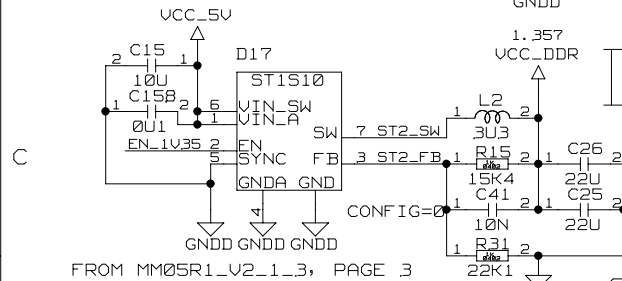

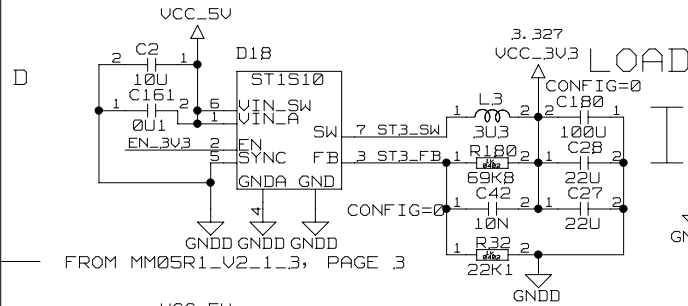


POWER





POWER JACK

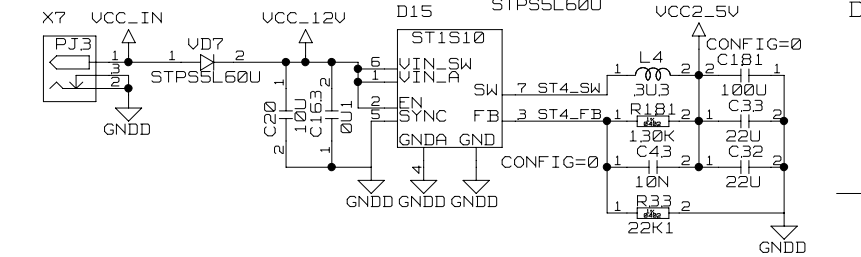


4.07V 5V THRESHOLD

2.93V 3V3 THRESHOLD

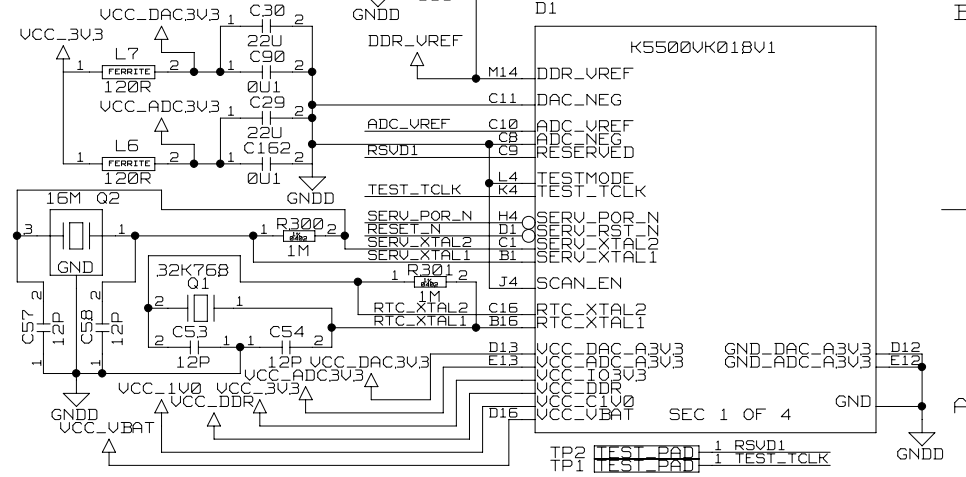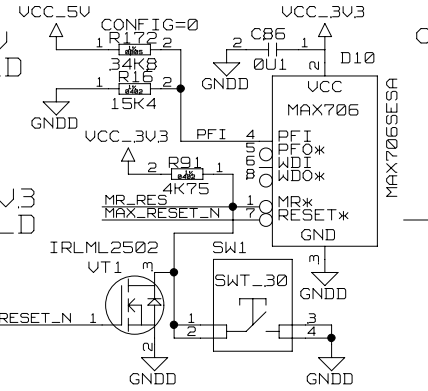

DDR.3




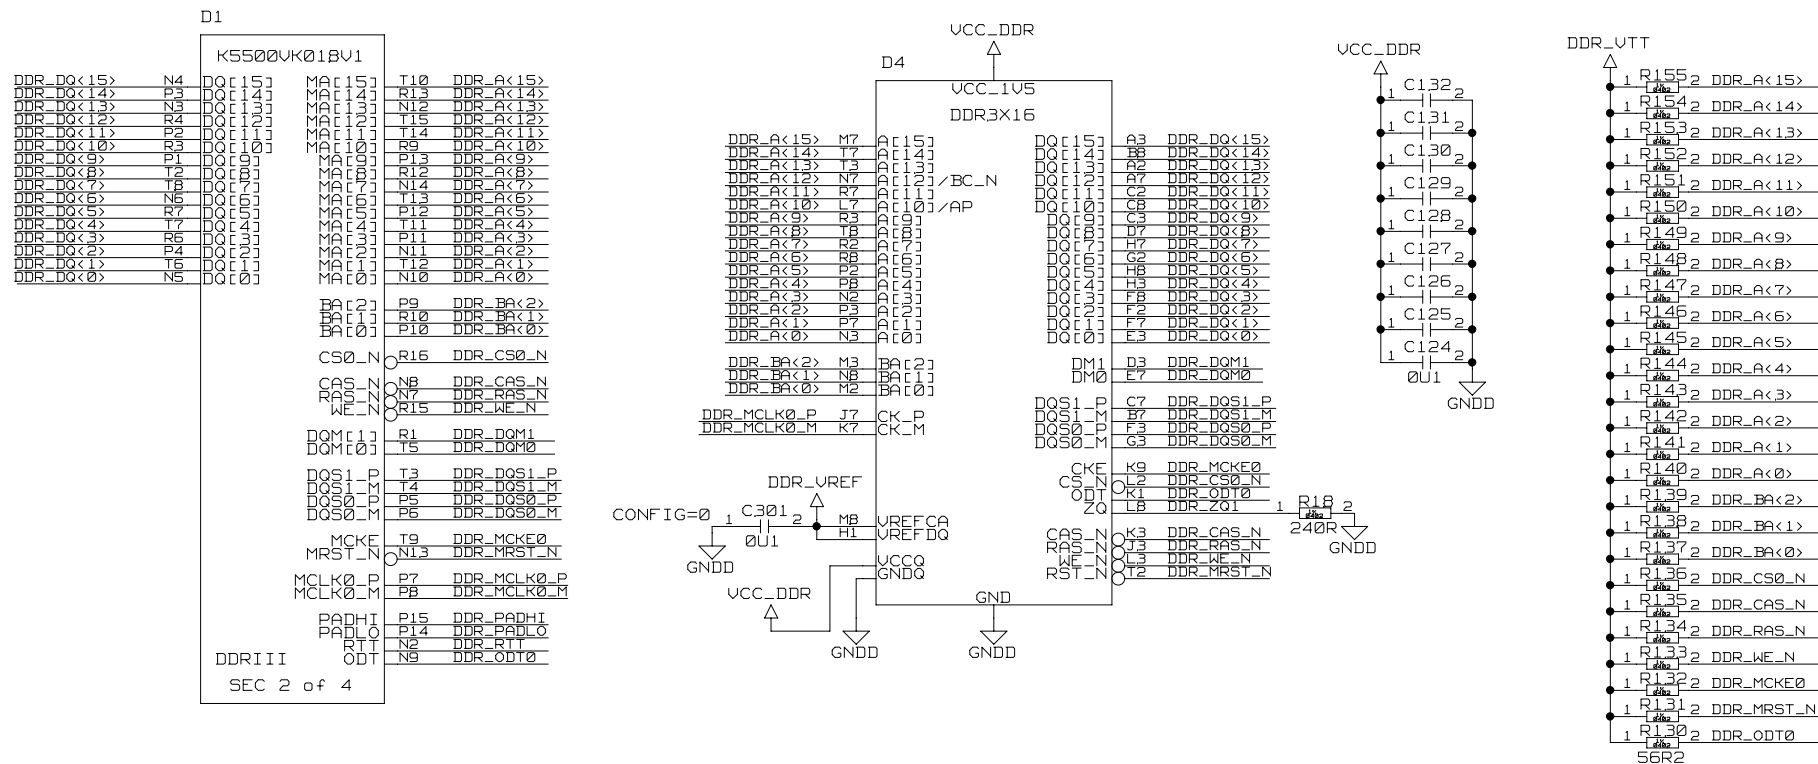


FROM FCS_KMK_V1_1_6, PAGE 3


ИЗМ.	ЛИСТ	№ ДОКУМЕНТА	ПОДП.	ДАТА

ЮКСУ.467444.055 3.3


ЛИСТ
3

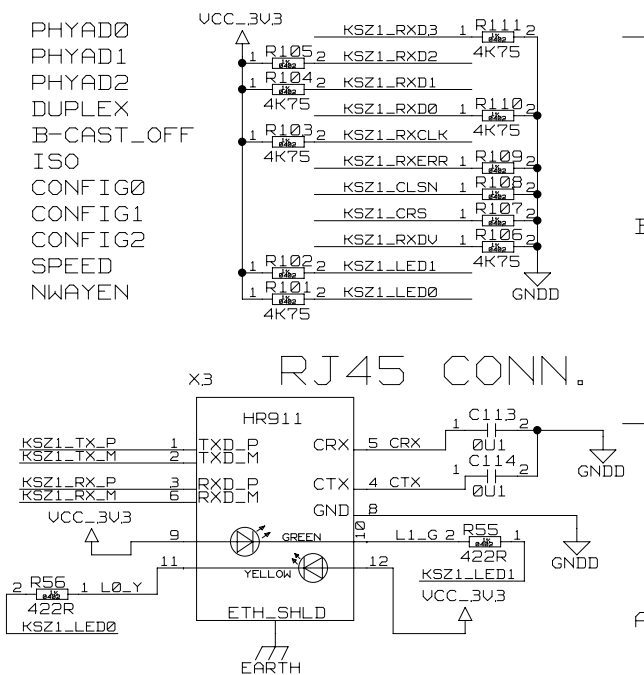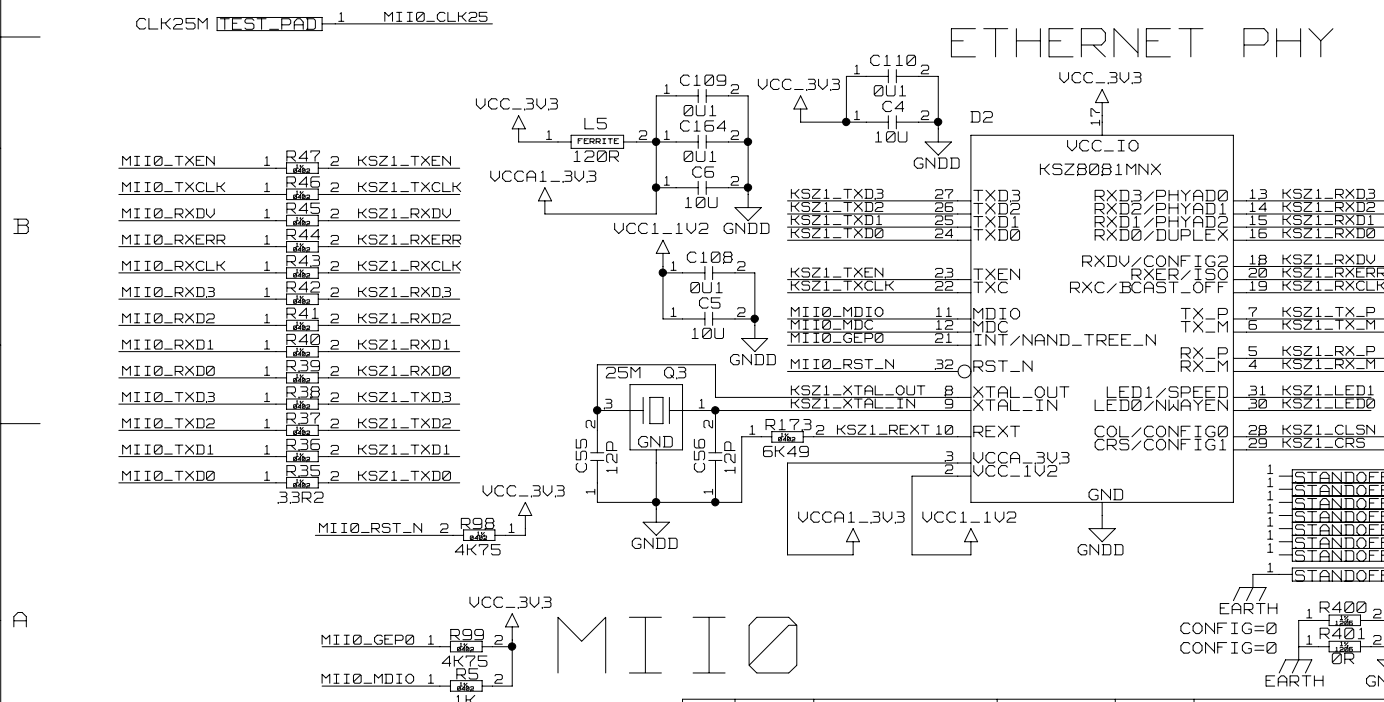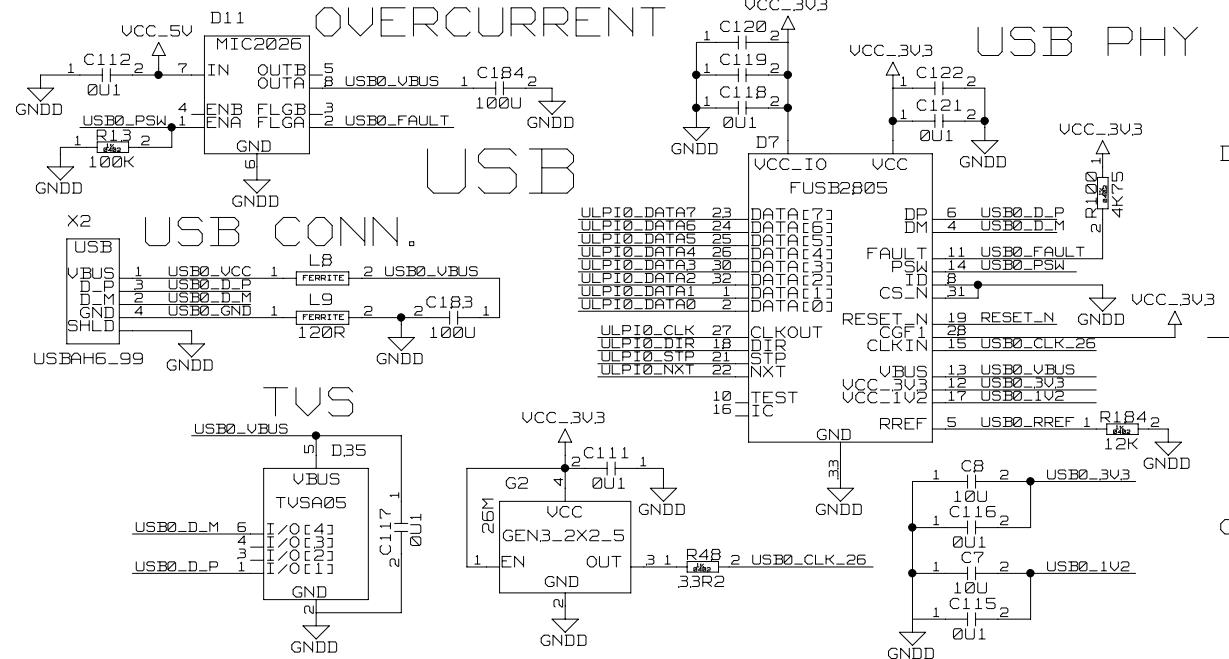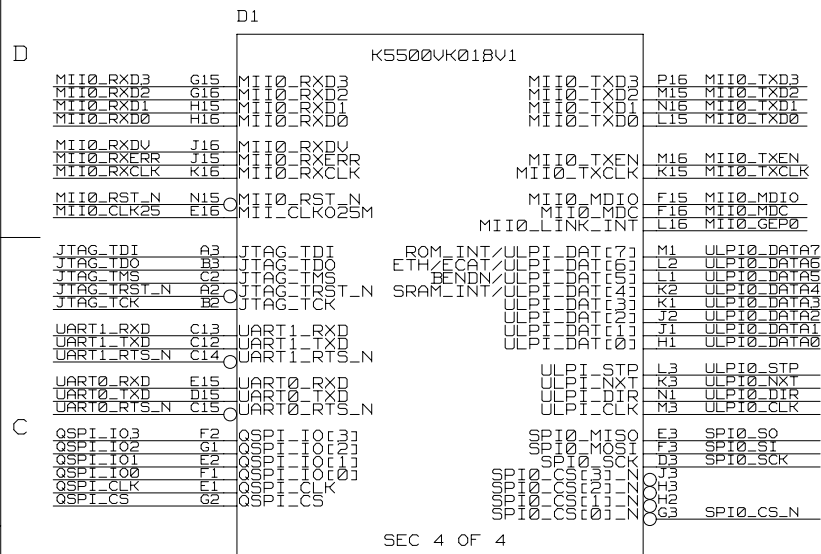



ESD

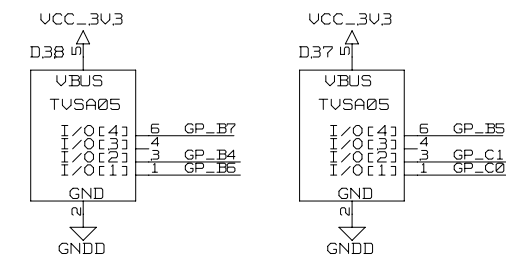


GPIO LEDs

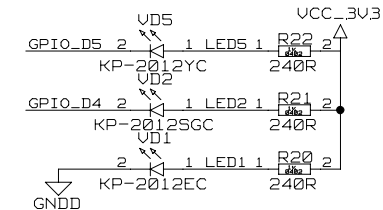




RASPBERRY

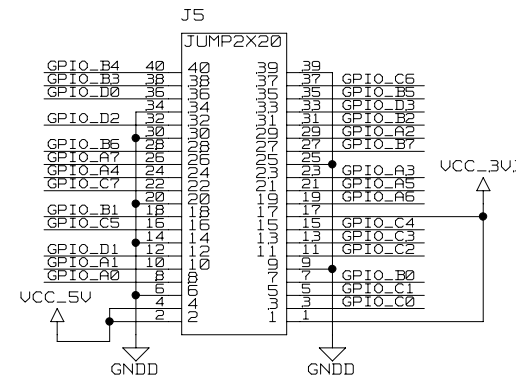

ARDUINO

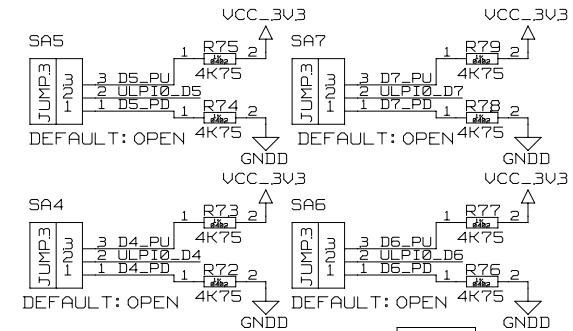

GP II

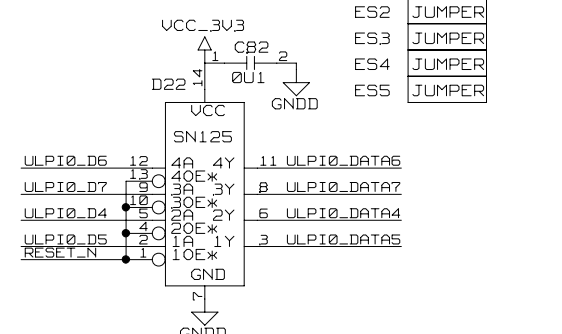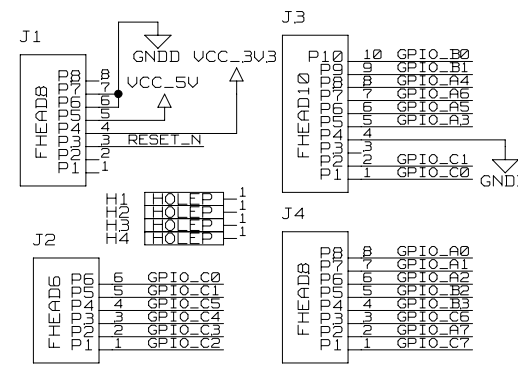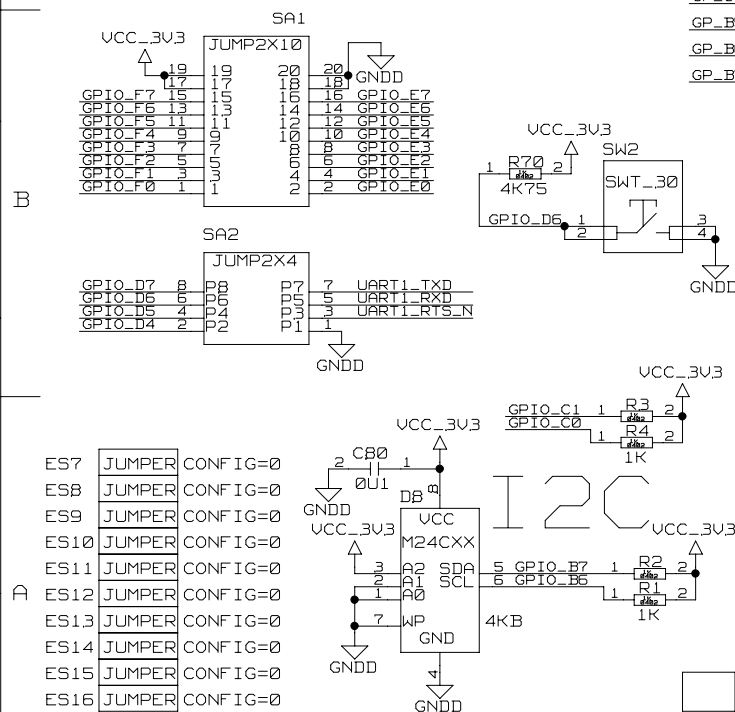

ADDR: 1010 100

ЮКСУ.467444.055 3.3



「